


M22 DROP LOCKING CLIP


DWG NO:




TO DISENGAGE:
PLACE FLAT HEAD SCREWDRIVER
HERE AND TURN CLOCKWISE.





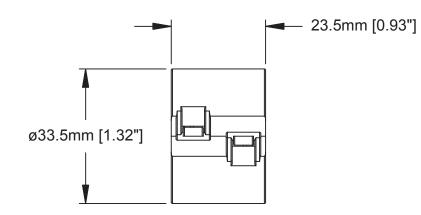

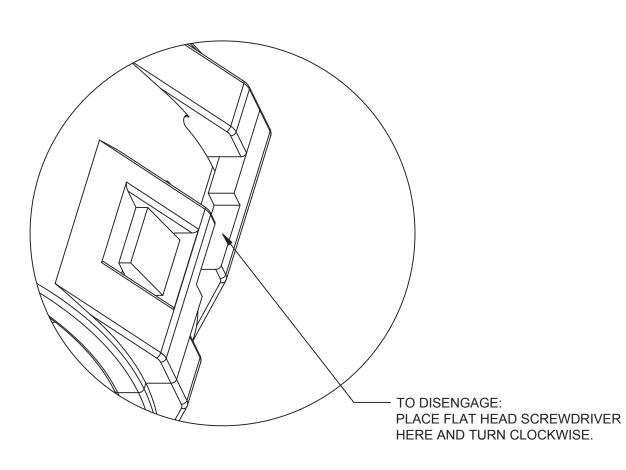



| | PART NUMBER | | | DESCRIPTION | | | | | | | ITEM |
|--|----------------|--|-----|-------------------------------------|--|--------------------|------|-------|-------|------|------|
| QUANTITY | MATERIALS LIST | | | | | | | | | | |
| UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 | | SIGNATURES | | DATE | Amphonol | | | | | | |
| | | DRAWN: | KMM | 12-MAY-14 | Amphenol | | | | | | |
| 2 PL DEC ±0.15 3 PL DEC ±0.08 | Angles ±1° | CHECKED: | MRF | 12-MAY-14 | Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 | | | | | | |
| 3) Note reference | | ENGINEER: | KMM | | | | | | | | |
| MATERIAL SPECIFICA | TIONS: | APPROVAL: | RFC | 12-MAY-14 | | | | | | | |
| PROCESS SPECIFICATIONS: NEXT ASSY: | | CUSTOMER: | | | M22 DROP LOCKING CLIP | | | | | | |
| | | THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, | | | | | | | | - | |
| | | SPECIFICATIONS AND PERFORI SHOWN HEREON ARE THE PRO THE AMPHENOL CORPORATION OF REPRODUCTION ARE IMPLIE DIMENSIONS ARE SUBJECT TO MANUFACTURING VARIATIONS. | | PERTY OF N. NO RIGHTS ED. ALL | SIZE TYP | TYPE DWG NO: P2904 | | | | | A1 |
| | | | | | SCALE: FUI | LL | C-P2 | 29041 | SHEET | 1 of | 1 |

TECHNICAL DATA:

1) MATERIALS: THERMOPLASTIC

THERMOPLASTIC COLOR: BLACK

2) RoHS COMPLIANT