



REV	ECO	DATE
A1	ADD TB	7/7/2005
D	21966	3/18/2009
Е	25326	5/1/2015

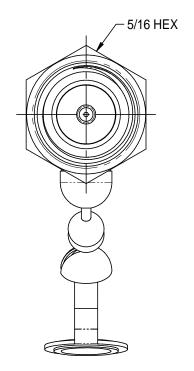

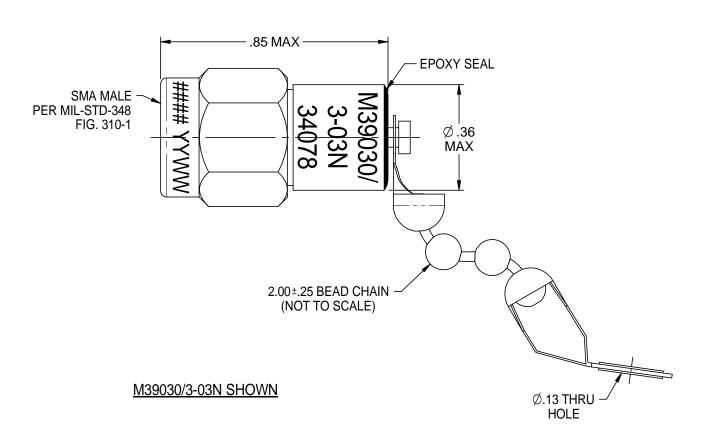

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. MATERIAL & FINISH:
- 1.1 BODY: GOLD PLATED STAINLESS STEEL
- 1.2 DIELECTRIC: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.4 GASKET: SILICONE RUBBER
- 1.5 BEAD CHAIN: STAINLESS STEEL
- 2. SPECIFICATIONS:
- 2.1 FREQUENCY RANGE: DC 18 GHz
- 2.2 IMPEDANCE: 50 OHMS
- 2.3 VSWR (MAX): 1.05+0.01f (GHz)
- 2.4 POWER HANDLING CAPABLITY:
- 2.4.1 AVERAGE: 0.5 WATTS MAX AT 25°C DERATED
 - LINEARLY TO 0.125 WATTS AT 125°C
- 2.4.2 PEAK: 50 WATTS WITH A 1% DUTY CYCLE
- 2.5 OPERATING TEMPERATURE RANGE: -55°C TO 125°C
- 2.6 WEIGHT (MAX): .25 oz

cinch	Model No. M39030/3-03(N OR S)		MIDWEST MICROWAVE
a bel group	RoHS2✓	Cage Code 34078	Title: QPL TERMINATION
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and	2011/65/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION • • • • • • • • • • • • • • • • • • •	Drawing No. Rev.
issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.	.XX ±.02 .XXX ±.005	Drawn by: C. WALLACE	M39030/3-03(N OR S)-01
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	ANGLES ±2°	Date: 5/7/2015	A DO NOT SCALE NONE Sheet 1 of 1