


ALUMINUM ELECTROLYTIC CAPACITORS

UCZ

Chip Type, High Reliability.
Low temperature ESR specification.



- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



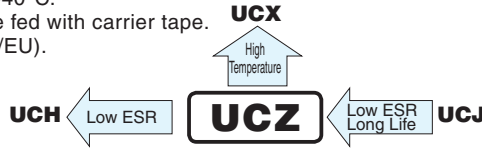


Specifications

Item	Performance Characteristics								
Category Temperature Range	-40 to +125°C								
Rated Voltage Range	10 to 100V								
Rated Capacitance Range	10 to 3300μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3μA, whichever is greater.								
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C								
	Rated voltage (V)	10	16	25	35	50	63	80	100
	tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.								
Stability at Low Temperature	Rated voltage (V)								Measurement frequency : 120Hz
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	6	4	4	3	
Endurance	After continuous application of rated voltage at 125°C and then restoring down to 20°C, the readings of measurements shall meet below.								
	Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16,18 × 16.5L	φ16,18 × 21.5L			
	Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.			
	Capacitance change	Within ±30% of the initial capacitance value							
	tan δ	300% or less than the initial specified value							
	Leakage current	Less than or equal to the initial specified value							
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.								
	Capacitance change	Within ±10% of the initial capacitance value							
	tan δ	Less than or equal to the initial specified value							
Marking	Black print on the case top.								
	Leakage current	Less than or equal to the initial specified value							


Chip Type

(φ 6.3) 【Standard】 ※φ6.3 × 5.8L : The vibration structure-resistant product can't support.
φ6.3 × 7.7L : The vibration structure-resistant product is available.

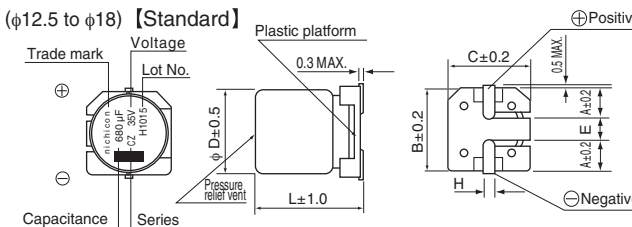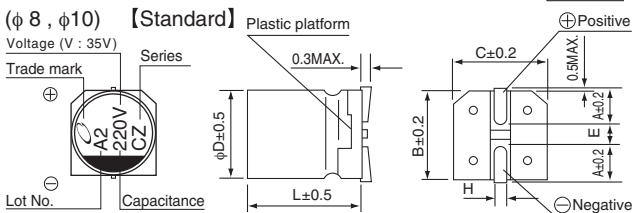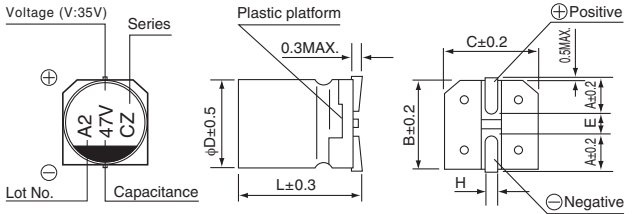


※φ12.5 to φ18 :
The vibration structure-resistant product is also available upon request, please ask for details.

Type numbering system (Example : 35V 47μF)

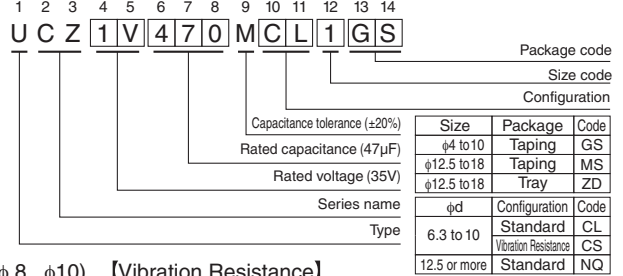

(φ 8, φ 10) 【Vibration Resistance】

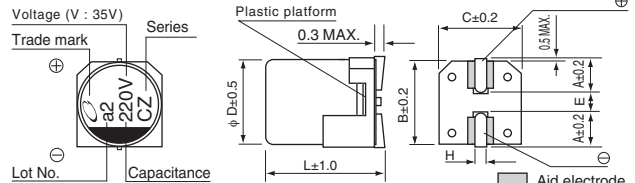

Standard	(mm)										Vibration Resistance (mm)		
φDxL	6.3x5.8	6.3x7.7	8x10	10x10	12.5x13.5	16x16.5	16x21.5	18x16.5	18x21.5	φDxL	8x10	10x10	
A	2.4	2.4	2.9	3.2	4.8	5.4	5.4	6.4	6.4	A	2.9	3.2	
B	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	B	8.3	10.3	
C	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	C	8.3	10.3	
E	2.2	2.2	3.1	4.5	4	6.3	6.3	6.3	6.3	E	3.1	4.5	
L	5.8	7.7	10	10	13.5	16.5	21.5	16.5	21.5	L	10	10	
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	H	1.1 to 1.5	1.1 to 1.5	

Rated Voltage		10	16	25	35	50	63	80	100
V		A	C	E	V	H	J	K	2A
Code		A	C	E	V	H	J	K	2A

UCZ

■ Dimensions

Cap. (μF)	V		10				16				25				35				50					
	Code		1A				1C				1E				1V				1H					
10	100														6.3 × 5.8	1.60	24	-	69	6.3 × 5.8	2.80	42	-	51
22	220														6.3 × 5.8	1.60	24	-	69	6.3 × 7.7	0.50	5	40	197
33	330									6.3 × 5.8	1.60	24	-	69	6.3 × 7.7	0.45	5	40	197	● 6.3 × 7.7	0.50	5	40	197
47	470									6.3 × 5.8	1.60	24	-	69	Recommend 35V →					● 6.3 × 7.7	0.50	5	40	197
68	680																			8 × 10	0.20	3	4.5	270
100	101														Recommend 16V →					● 6.3 × 7.7	0.45	5	40	197
220	221														8 × 10	0.20	3	4.5	270	8 × 10	0.20	3	4.5	270
330	331														● 8 × 10	0.20	3	4.5	270	● 8 × 10	0.20	3	4.5	270
390	391														10 × 10	0.15	2	3.5	500	10 × 10	0.15	2	3.5	500
470	471														10 × 10	0.15	2	3.5	500	10 × 10	0.15	2	3.5	500
560	561																			10 × 10	0.15	2	3.5	500
680	681																							
820	821																							
1000	102																							
1200	122																							
1400	142																							
1600	162																							
2200	222																							
2700	272																							
3300	332																							

Cap. (μF)	V		63				80				100						
	Code		1J				1K				2A						
10	100		6.3 × 7.7	2.00	100	-	60	8 × 10	0.75	50	-	70	8 × 10	0.75	50	-	70
22	220		8 × 10	0.70	35	-	100	● 8 × 10	0.75	50	-	70	● 8 × 10	0.75	50	-	70
33	330		● 8 × 10	0.70	35	-	100	● 8 × 10	0.75	50	-	70	10 × 10	0.55	35	-	115
47	470		● 8 × 10	0.70	35	-	100	10 × 10	0.55	35	-	115	10 × 10	0.55	35	-	115
82	820																
150	151		12.5 × 13.5	0.20	1.3	14	1000	12.5 × 13.5	0.28	1.9	14	700	16 × 16.5	0.19	1.4	4.8	1000
180	181		12.5 × 13.5	0.20	1.3	14	1000						18 × 16.5	0.17	1.1	3.9	1100
220	221		12.5 × 13.5	0.20	1.3	14	1000						16 × 21.5	0.12	0.8	2.6	1600
270	271							16 × 16.5	0.19	1.4	4.8	1000					
300	301												18 × 21.5	0.11	0.7	2.4	1700
330	331							18 × 16.5	0.17	1.1	3.9	1100					
390	391		16 × 16.5	0.13	0.9	4.8	1900	16 × 21.5	0.12	0.8	2.6	1600					
470	471		18 × 16.5	0.11	0.82	3.9	2000										
520	521							18 × 21.5	0.11	0.7	2.4	1700					
560	561		16 × 21.5	0.07	0.46	2.0	2500										
750	751		18 × 21.5	0.068	0.44	1.8	2600										

※ Guaranteed time of ESR after endurance test

Size	Guaranteed time
φ6.3 × 5.8L	-
φ6.3 × 7.7L, φ8 × 10L	10 to 50V 2000hrs.
φ10 × 10L	63 to 100V -
φ12.5	2000hrs.
φ16, 18 × 16.5L	2000hrs.
φ16, 18 × 21.5L	3000hrs.

Max. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple Current (mA rms) at 125°C 100kHz

● : In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.